



BeyondTrust

Privilege Management for Mac ePO Extension 23.10 Installation Guide

Table of Contents

Introduction	4
BeyondTrust Endpoint Privilege Management App	4
Install the Endpoint Privilege Management ePO Extension	5
Requirements	5
Install the Extension	5
Configure ePO User Permission Sets	6
Assign Endpoint Privilege Management Permissions	6
Configure Additional Permissions	8
Upgrade Endpoint Privilege Management for Mac	10
Deploy Endpoint Privilege Management for Mac	12
Import Endpoint Privilege Management for Mac Package into ePO	12
Endpoint Privilege Management for Mac with Trellix Endpoint Security (ENS)	13
Create and Assign a Client Task to Deploy Endpoint Privilege Management	13
Assign and Run the Client Task to Deploy the Agent	14
Verify the Endpoint Privilege Management for Mac Deployment	14
Endpoint Privilege Management and ePO Events and Reporting	16
Trellix ePO Reports	16
Configure BeyondTrust Reporting	17
Set up a New SQL Server Instance for BeyondTrust Endpoint Privilege Management Reporting	17
Create the Required Database User Accounts	17
Install the Endpoint Privilege Management Reporting Database	19
Configure Permissions for the EventParser User	22
Create Registered Servers for Your Deployment	23
Configure the BeyondTrust Reporting Registered Server	24
Configure the Endpoint Privilege Management Reporting Staging Registered Server	24
Configure the BeyondTrust Admin Registered Server	25
Configure the Database Server Registered Server	26
Create Automated Tasks Using ePO Server Tasks	27
Create the Endpoint Privilege Management Reporting Event Staging Server Task	27
Create the Endpoint Privilege Management Reporting Purge Server Task	28

Create the Endpoint Privilege Management Reporting Reputation Update Server Task	29
Create the Purge Threat Event Log Server Task	30
Run an Automated Task Outside the Scheduled Time	32
Performance Tuning on the ePO Server	33

Introduction

This guide assumes that you have set up your ePO server and you now need to install the Endpoint Privilege Management ePO Extension.

This guide shows you how to install the Endpoint Privilege Management ePO Extension, create a client task to deploy Endpoint Privilege Management to your endpoints, and configure your ePO server for Endpoint Privilege Management tasks.

i If you are upgrading an existing BeyondTrust Endpoint Privilege Management ePO Extension, please see "[Install the Endpoint Privilege Management ePO Extension](#)" on page 5.

BeyondTrust Endpoint Privilege Management App

Starting in version 23.10, we are updating and enhancing the policy editing and reporting experience for our Endpoint Privilege Management for Windows and Mac solution deployed via Trellix ePolicy Orchestrator (ePO). This new experience will mean policy editing and reporting will happen outside of the ePO extension and will instead be delivered via a new Electron-based application called the BeyondTrust Endpoint Privilege Management App, published by BeyondTrust.

i For more information, please see:

- [BeyondTrust Endpoint Privilege Management App User Guide](#)
- [BeyondTrust Endpoint Privilege Management App Frequently Asked Questions](#)

Install the Endpoint Privilege Management ePO Extension

The Endpoint Privilege Management ePO Extension:

- Allows you to use Trellix ePolicy Orchestrator to manage your endpoints.
- The installer is a ZIP file and includes the build number in its name.


Requirements

i For more information, please see [Endpoint Privilege Management ePO Extension 22.7 Release Notes at https://www.beyondtrust.com/docs/release-notes/privilege-management/windows-and-mac/epo-extension/epo-extension-22-7.htm](https://www.beyondtrust.com/docs/release-notes/privilege-management/windows-and-mac/epo-extension/epo-extension-22-7.htm).

Install the Extension

To install the Endpoint Privilege Management ePO Extension extension:

1. Log in to Trellix ePolicy Orchestrator and navigate to **Menu > Software > Extensions**.

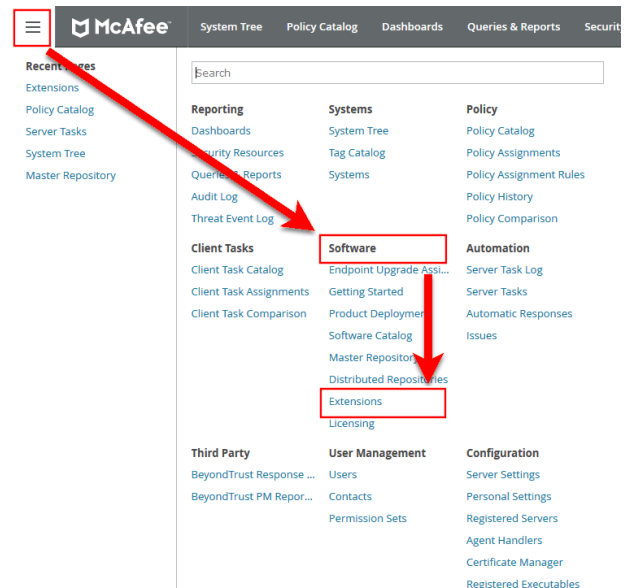

2. Click **Install Extension** in the top-left corner. The **Install Extension** dialog box appears.
3. Enter or browse to the location of the Endpoint Privilege Management server extension package **Defendpoint_x_x_x_xx.zip** and click **OK**.
4. On the **Install Extension** summary screen, click **OK** in the bottom-right corner to proceed with the installation.

The BeyondTrust Endpoint Privilege Management ePO Extension is now installed on your ePO server.

Configure ePO User Permission Sets

There are four permission sets in ePO by default. You can view these at **Menu > User Management > Permission Sets**, on the left menu. Installing the Endpoint Privilege Management ePO Extension grants some privilege management permissions to the following default ePO permissions sets:

- **Executive Reviewer:** Privilege Management Policy Permission: View and Change Settings
This enables the user to access the policy catalog, but not to view or change the policy. The user requires **Run permission for BeyondTrust Endpoint Privilege Management** under **BeyondTrust Endpoint Privilege Management** to view policy.
- **Global Reviewer:** Privilege Management Policy Permission: View Settings
This enables the user to access the policy catalog, but not to view or change the policy. The user requires **Run permission for BeyondTrust Endpoint Privilege Management** under **BeyondTrust Endpoint Privilege Management** to view policy.
- **Group Admin:** No Endpoint Privilege Management permissions.
- **Group Reviewer:** No Endpoint Privilege Management permissions.



Note: Users need to be members of the permission sets required for Endpoint Privilege Management. Please refer to Trellix documentation for how to add users to permission sets.

Alternatively, you can create your own permission sets in ePO by selecting **New Permission Set**. After this is selected, you can name the permission set and assign users. Once you click **Save**, you can apply permissions.

If a user needs to view or change BeyondTrust policies, they require the **Run permission for BeyondTrustEndpoint Privilege Management** permission under **BeyondTrustEndpoint Privilege Management** and the **View settings** or **View and change settings** permission under **BeyondTrustEndpoint Privilege Management Policy**.

Assign Endpoint Privilege Management Permissions

Permissions that can be configured for each Endpoint Privilege Management permission set are:

- Endpoint Privilege Management
- Endpoint Privilege Management Policy
- Policy Assignment Rule
- Policy Management

Configure Permissions

To configure user permissions for Endpoint Privilege Management in the ePO Server.

1. In **Trellix ePolicy Orchestrator**, navigate to **Menu > User Management > Permission Sets**.

2. Select the permission set that you want to configure.

User Management

Permission Sets [New Permission Set](#) [Import](#) [Export All](#)

Permission Sets		
Automatic Response:		Create, edit, view, and cancel Responses; view Response results in the Server Task Log
BT Approver		
BT Non Approver		
Executive Reviewer		
Global Reviewer		
Group Admin		
Group Reviewer		
Standard BeyondTrust		
BeyondTrust Privilege Management		Run permissions for BeyondTrust Privilege Management and Response Generator
BeyondTrust Privilege Management Policy		View and Change Policy Settings
Client Events:		View Client Events
Client Task Management:		No permissions
Contacts:		Create and edit contact entries
Dashboards:		Use public dashboards; create and edit private dashboards
Event Notifications:		Create and edit registered executables Edit rules and notifications for whole System Tree (overrides System Tree group access permissions)
Issue Management:		No permissions
LDAPs:		No permissions
McAfee Agent:		No permissions
Multi-server roll up data:		No permissions
Policy Assignment Rule:		View and Edit Rules
Policy Management:		Approver Permission
Product Improvement Program:		No permissions
Queries and Reports:		Use public groups; create and edit private queries/reports.

Endpoint Privilege Management

1. Locate **BeyondTrust Endpoint Privilege Management** and click **Edit**.
2. Select a permission:
 - **Run permission for BeyondTrust Endpoint Privilege Management:** Users can manage Endpoint Privilege Management only.
 - **Run permission for BeyondTrust Response Generator:** Users can manage the Endpoint Privilege Management ePO Response Generator only.
 - **Run permissions for BeyondTrust Endpoint Privilege Management and for Response Generator:** Users can manage both.
 - **No permissions:** Users cannot manage either component.
3. Click **Save**.

Endpoint Privilege Management Policy

1. Locate **BeyondTrust Endpoint Privilege Management Policy** and click **Edit**.
2. Select a permission:
 - **View and change task settings:** Users can edit policy and Workstyles.
 - **View settings:** Users can read but not edit policy and Workstyles.
 - **No permissions:** Users cannot read or edit policy and Workstyles.
3. Click **Save**.

Policy Assignment Rule

1. Locate **Policy Assignment Rule** in the list and click **Edit**.
2. Select a permission:
 - **View and Edit Rules:** Users can manage policy rules.

- **View Rules:** Users can view but not manage policy rules.
 - **No permissions:** Users cannot view or manage policy rules.
3. Click **Save**.

Policy Management

Add users who can make policy changes independently, including approving or rejecting policy change requests.

1. Locate **Policy Management** in the list and click **Edit**.
2. Select one of the following:
 - **No Permission - Users with this permission must submit policy changes for approval**
 - **Approver Permission - Users with this permission can make policy changes independently. This includes the ability to approve or reject policy change requests**
3. Click **Save**.

Configure Additional Permissions

Other user permissions you, as an admin, may want to consider granting include those below, in order to:

- Modify deployment of the Endpoint Privilege Management endpoint client
- Access the **System Tree** tab
- Edit the groups and systems within the System Tree
- Wake and deploy agents
- Assign policies or client tasks to a group
- Create client tasks with the software or with the Software Catalog

To edit the permissions, navigate to **Menu > User Management > Permission Sets** and select the appropriate permission set. Alternatively, create a permission set by clicking the **New Permission Set** button. A list of settings you can edit appears in the right panel. Click **Edit** on the appropriate setting to edit it. Once finished, click **Save**.

Trellix Agent: Policy and Trellix Agent: Tasks

A user may need **Trellix Agent** permissions if they need to view or change client deployment tasks of Endpoint Privilege Management for Windows or Endpoint Privilege Management for Mac.


User Management

Permission Sets

Edit Permission Set for Group Admin: McAfee Agent	
McAfee Agent : Policy	<input type="radio"/> No permissions <input type="radio"/> View settings <input checked="" type="radio"/> View and change settings
McAfee Agent : Tasks	<input type="radio"/> No permissions <input type="radio"/> View settings <input checked="" type="radio"/> View and change settings

Systems


A user may need the **Systems** permission so they can access the **System Tree** tab, wake up agents, edit the groups and systems in the System Tree, and deploy agents.

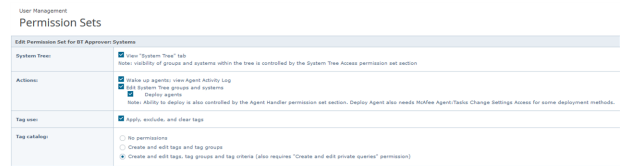

System Tree

A user may need the **System Tree access** permission if they need access to certain groups (assigning policies or client tasks to a group, for example).


User Management Permission Sets

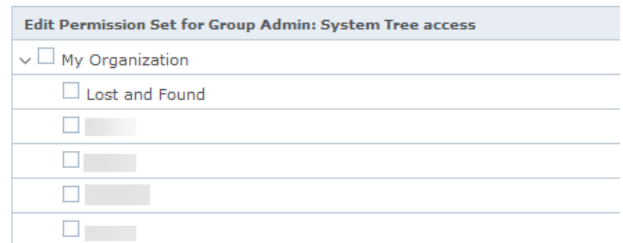


Software and Software Catalog

A user may need the **Software** and **Software Catalog** permissions if they need to create client tasks with software.

User Management Permission Sets

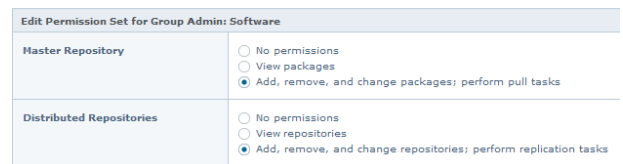

User Management Permission Sets



Upgrade Endpoint Privilege Management for Mac



Note: ePO will not recognize Endpoint Privilege Management for Mac if you upgrade the Endpoint Privilege Management for Mac clients before the Endpoint Privilege Management ePO extension. In addition, ePO Threat events will be rejected if this order is not followed, although they can be recovered once the upgrade to the Endpoint Privilege Management ePO Extension has been completed.

Version 5 of the Endpoint Privilege Management ePO Extension is compatible with older Endpoint Privilege Management for Mac clients.

The recommended order to upgrade BeyondTrust Endpoint Privilege Management for Mac software is:

- Upgrade the Endpoint Privilege Management ePO Extension
- Upgrade Endpoint Privilege Management Reporting (if in use)
- Upgrade Endpoint Privilege Management Clients



Note: If you have a requirement to upgrade BeyondTrust software in a different order from that listed above, please contact your BeyondTrust representative.

Upgrade the Endpoint Privilege Management ePO Extension

When you are upgrading, the newer version of the Endpoint Privilege Management ePO Extension recognizes the existing Endpoint Privilege Management ePO Extension installation and prompts you to upgrade it. We recommend upgrading, as removing the installed Endpoint Privilege Management ePO Extension deletes your settings.

To upgrade the Endpoint Privilege Management ePO Extension, you need to use ePO to install the latest extension from **Software > Extensions**. When you upload the new Endpoint Privilege Management ePO Extension, ePO prompts you that this newer version of the ePO Extension will replace the previous extension. Click **OK** to upgrade the Endpoint Privilege Management ePO Extension. You do not need to restart ePO for the upgrade to take effect. Existing registered servers, client tasks, and server tasks are not affected.



Note: If you see an error message that states "Please stop CopyFromStaging from running before upgrading the database," make sure that no new events are being processed by querying the above tables and try again.

This upgrade path can be applied to both standalone Reporting configurations and to configurations spread over multiple machines.

Upgrade Endpoint Privilege Management for Mac Clients

You can upload a newer version of the Endpoint Privilege Management for Mac client to ePO and deploy it as required.

Depending on the type of installation, a restart of the endpoint may be required. When installing in silent mode, a reboot occurs automatically.

The Endpoint Privilege Management ePO Extension maintains backwards compatibility with the Endpoint Privilege Management for Mac client. You can use a later version of the Endpoint Privilege Management ePO Extension with an earlier version of the Endpoint Privilege Management for Mac client. However, not all features in the Endpoint Privilege Management ePO Extension are supported with earlier versions of the client.



For more information, please see the [Endpoint Privilege Management for Mac Administration Guide](https://www.beyondtrust.com/docs/privilege-management/mac/index.htm), at <https://www.beyondtrust.com/docs/privilege-management/mac/index.htm>.

Upgrade the Reporting Database Using SQL Scripts

Use these instructions to upgrade the Endpoint Privilege Management Reporting database where you cannot use the installer or need to do a manual installation, for example, EPM in Azure. SQL scripts are provided to manage these upgrades.

To upgrade an Endpoint Privilege Management Reporting database using SQL scripts:

1. The SQL scripts are provided as part of the Reporting installers. Alternatively, you can contact BeyondTrust Technical Support for them.



Note: There is a README file provided in this directory to assist you.

2. Run the following SQL query to find the current version of the database. This returns the version of the database.

```
select * from DatabaseVersion
```



Note: This SQL query works for Endpoint Privilege Management Reporting databases 4.5 and later.

3. Execute the upgrade script where the name is the next version number and carry on applying these until the desired version is reached.



Example: If your current database version is 4.3.16 and you want to upgrade to version 5.0.0, execute the following scripts in order:

1. **Script_4.5.0_Updates.sql**
2. **Script_5.0.0_Updates.sql**

Please check the SQL log for any errors and contact BeyondTrust Technical Support if necessary.

Deploy Endpoint Privilege Management for Mac

Use the following steps to import the Endpoint Privilege Management client for ePO into the ePO server and create a client task to deploy it to your endpoints:

- Import the package into ePO.
- If using **Trellix Endpoint Security (ENS)**, configure Endpoint Privilege Management for Mac with **Trellix Endpoint Security**.
- Create and assign a client task to deploy Endpoint Privilege Management.
- Assign and run the client task to deploy the agent.
- Verify the Endpoint Privilege Management for Windows deployment.

i For more information, please see the following:

- ["Import Endpoint Privilege Management for Mac Package into ePO" on page 12](#)
- ["Endpoint Privilege Management for Mac with Trellix Endpoint Security \(ENS\)" on page 13](#)
- ["Create and Assign a Client Task to Deploy Endpoint Privilege Management" on page 13](#)
- ["Assign and Run the Client Task to Deploy the Agent" on page 14](#)
- ["Verify the Endpoint Privilege Management for Mac Deployment" on page 14](#)


Import Endpoint Privilege Management for Mac Package into ePO

If you use Trellix ePolicy Orchestrator to deploy Endpoint Privilege Management for Mac to your endpoints, you need the Endpoint Privilege Management zip file package for your operating system.

The client package for Mac is a zip file that includes the Endpoint Privilege Management client for Mac and the ePO Mac adapter.

To install the Defendpoint package:

1. Log in to **ePolicy Orchestrator** and navigate to **Menu > Software > Master Repository**.

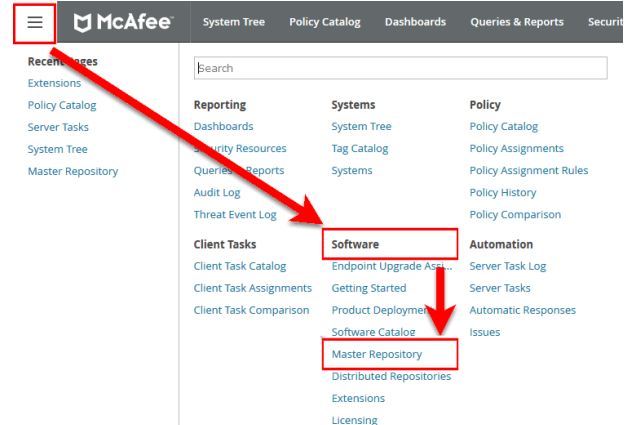

2. Click **Check In Package** at the top-left of the screen. The **Check In Package** wizard appears.
3. Leave **Package Type** as the default of **Product or Update (.ZIP)** and click **Browse**.
4. Navigate to and select the Endpoint Privilege Management for Mac package that you want to use on your local machine.


- Click **Open** and then click **Next** at the bottom-right of the screen.
- Leave the **Branch** option as **Current** and click **Save** at the bottom-right of the screen to save the client package to the master repository.

The Endpoint Privilege Management for Mac package will be displayed in the **Packages in Master Repository** list.

Endpoint Privilege Management for Mac with Trellix Endpoint Security (ENS)

If you are using **Trellix Endpoint Security (ENS)**, you need to do an additional task. Follow the steps below to configure Endpoint Privilege Management for Mac with **Trellix Endpoint Security**. If you're not using ENS, you can skip this section.

- Navigate to **Policy Catalog** and select **Trellix Endpoint Security** from the **Product** dropdown menu.
- In the **Self Protection** section, if the **Enable Self Protection** box is checked:
 - Check the three boxes shown for **Files and folders**, **Registry** and **Processes**.
 - Type **DEFENDPOINTSERVICE.EXE** into the **Exclude these processes** text box and click **Save**.

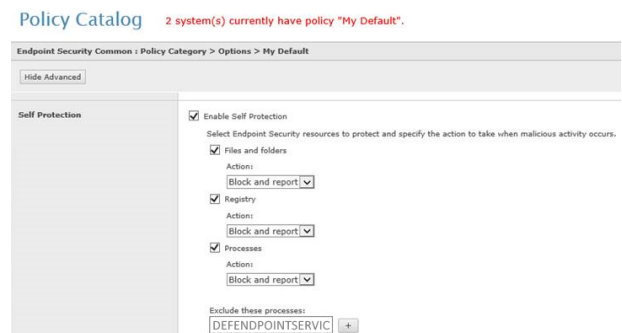

Create and Assign a Client Task to Deploy Endpoint Privilege Management

Endpoint Privilege Management for Mac is deployed to client computers using **ePolicy Orchestrator** client tasks. Client tasks are assigned to groups within the **System Tree**. This section guides you through the creation of a client task for Endpoint Privilege Management for Mac, and the assignment of the client task to the group in the **System Tree**.

To create a client task for Endpoint Privilege Management for Mac package:

- Log in to **ePolicy Orchestrator** and navigate to **Menu > Client Tasks > Client Task Catalog**.
- Select **Trellix Agent > Product Deployment** from the left pane and click **New Task** on the top-left of the page.
- Select **Product Deployment** from the **Task Types** dropdown menu and click **OK**.
- Enter the following options:

Field	Description
Task Name	Name the task Endpoint Privilege Management x.x.xxx , where x represents the full version of Endpoint Privilege Management you're deploying.
Description	This is an optional field you can use if required.
Target platforms	This is the operating system of your endpoints. Check the Mac box.
Products and components	Select BeyondTrust Endpoint Privilege Management for Mac x.x.xxx from the dropdown menu. Confirm Action is set to Install , Language is set as English , and Branch is set to Current .
Postpone Deployment	Use this option to allow your users to postpone the deployment of Endpoint Privilege Management on their machines.


- Click **Save** to finish creating the client task.

The client task is displayed in the **Product Deployment** list, and is now ready for assignment to a group or client computer in the **System Tree** prior to running it.


Assign and Run the Client Task to Deploy the Agent

The Trellix Agent must be installed on your endpoints prior to installing Endpoint Privilege Management for Mac.

- Navigate to the **System Tree > Systems** tab and select the endpoint or group containing your endpoints. You may need to drill down to the location using the tree on the left.
- Click **Actions** on the bottom of the screen and select **Agent > Run Client Task Now**.

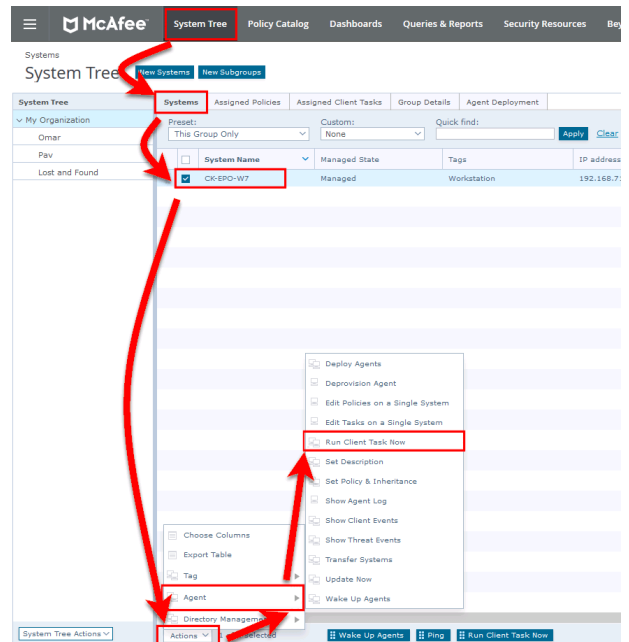

- Leave the **Product** as **Trellix Agent**.
- Select **Product Deployment** from the **Task Type**.
- Select your Endpoint Privilege Management for Mac client from the **Task Name** list. This is the name of the client task that you created to deploy Endpoint Privilege Management for Mac.
- Your list of endpoints is shown in the bottom panel. Click **Run Task Now**.

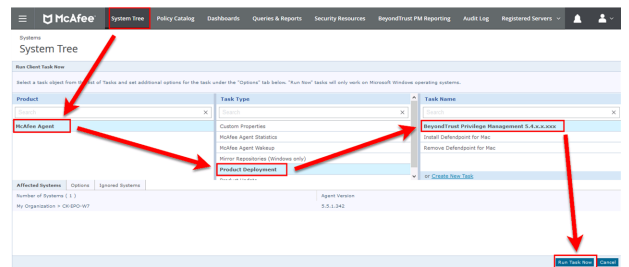

Once you have deployed the Endpoint Privilege Management for Mac package, the endpoints automatically send a manifest of product information to the ePO server. This information is stored as a property of the client computer in the **System Tree** on the **Products** tab.

Verify the Endpoint Privilege Management for Mac Deployment

You can verify the Endpoint Privilege Management for Mac deployment from the server and client.




Note: You may not be able to verify deployments if your endpoints are pending a restart.


Server Verification

To verify that the Endpoint Privilege Management for Mac package has been successfully deployed:

1. Log in to **ePolicy Orchestrator** and navigate to **Systems** > **System Tree**. The **System Tree** is also available as a shortcut in ePO on the top-menu bar.

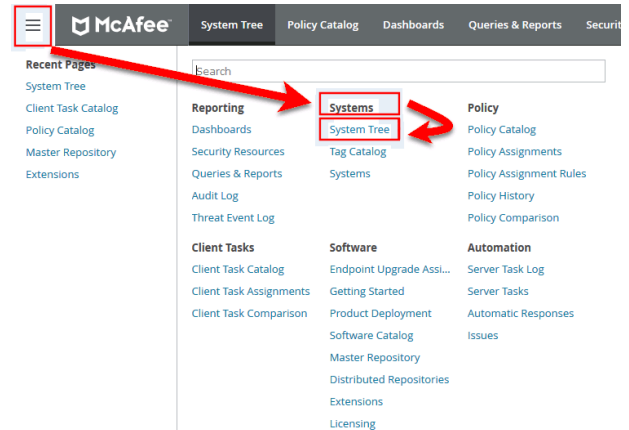

2. The **Systems** tab is the default view. Click the row of the client computer you want to check.

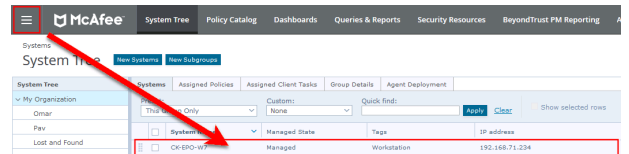

3. Click the **Products** tab and then select **BeyondTrust Endpoint Privilege Management for Mac** from the product list. Here you can check the status of the deployment and deployed files.



Note: In certain cases there may be a delay in the client connecting back to the ePO server. Click **Wake Up Agents**, check the **Force complete policy and task update** box, and click **OK** to force the connection.

Client Verification

To verify that the Endpoint Privilege Management client is connected to the ePO server:

1. The Mac endpoint will not have a Trellix agent monitor unless it has Trellix ENS installed.
2. To update the policy on the endpoint or send properties, you can use command line switches to do so. The user will use the **cd** command to navigate to the **/Library/McAfee/Agent/bin** folder.



Note: Sometimes there is a delay in the client connecting to the ePO server. Click **Check New Policies** and select **Enforce Policies** to force a policy update. If you see the endpoint receiving policies from the ePO server, then the connection is successful.



For a list of switches that may be used, please see the [McAfee Agent command-line switches](https://kcm.trellix.com/corporate/index?page=content&id=KB52707) at <https://kcm.trellix.com/corporate/index?page=content&id=KB52707>.

Endpoint Privilege Management and ePO Events and Reporting

There are two types of reporting available:

- Trellix ePO reporting, threat events only
- Endpoint Privilege Management reporting. Starting in version 23.10, you can deploy the BeyondTrust Endpoint Privilege Management App to run reports on your ePO Endpoint Privilege Management environment.

Trellix ePO Reports

No additional configuration is required to use Trellix ePO Reporting.

ePO Reporting is available by default and allows you to build complex queries to analyze your data. ePO Reporting uses threat events on the **Queries and Dashboards** page and the **Dashboards** page.

ePO Reporting can also report on report events in the **Queries and Dashboards** page if **BeyondTrust Reporting** is configured.

There are four **Dashboards** and twelve default **Queries and Reports** available by default for BeyondTrust Endpoint Privilege Management for Mac. You can configure dashboards, charts, and tabular reports on the **Dashboards** and **Queries and Reports** pages. These can incorporate data from other ePO server products in ePO.

All the events are stored in the ePO database.

Configure BeyondTrust Reporting

BeyondTrust Reporting is an optional Reporting suite that is integrated into ePO.

BeyondTrust Reporting is available in two places in the ePO server interface:

- **Queries and Reports** page
- **BeyondTrust Endpoint Privilege Management Reporting** page

BeyondTrust Endpoint Privilege Management Reporting integrates with Intel Security Threat Intelligence Exchange (TIE), so it has additional support for application reputation using Data Exchange Layer (DXL) and VirusTotal.



Note: Times on reports are shown using the time zone of the ePO server. All events are stored in the database in UTC.

Set up a New SQL Server Instance for BeyondTrust Endpoint Privilege Management Reporting

For BeyondTrust Endpoint Privilege Management Reporting functionality, you can either use the same installation of SQL Server as the ePO server or you can use a different SQL installation. A new database is created for BeyondTrust Endpoint Privilege Management Reporting by the BeyondTrust Database installation.

The following SQL server versions are supported:

- SQL 2012 Standard or Enterprise
- SQL 2014 Standard or Enterprise
- SQL 2016 Standard or Enterprise
- Azure SQL Server



Note: Express SQL versions may be used for evaluation and demonstration purposes.



Please refer to the SQL documentation to create a new installation of SQL server, if required.

Create the Required Database User Accounts

You can either use a system administration account for the registered servers required for BeyondTrust Endpoint Privilege Management Reporting or you can use the default user accounts that are configured as part of the Endpoint Privilege Management database installation. This section describes using the least privilege default user accounts that are configured by the Endpoint Privilege Management database installer.

If you plan to use a system administration account for the BeyondTrust reporting registered servers, you do not need to complete the steps in this section.

We recommend that you use the accounts that the Endpoint Privilege Management database installer configures. These are:

- **ReportReader** user: Permissions include Read and Execute on the appropriate database objects.
- **EventParser** user: Permissions include Write access to certain database tables. Membership of local Event Log Readers group.
- **DataAdmin** user: Permissions include Read and Execute on the appropriate database objects

In addition to the users that the Endpoint Privilege Management database installer configures, you need to choose the user that you'll use to install the Endpoint Privilege Management database. This is known as the *DatabaseCreator* user.

This account must be able to execute installers on the machine with administrative privileges. Alternatively, you can use a SQL account for the DatabaseCreator user. This can be configured in the installer when you run it.

The DatabaseCreator user also needs SQL sysadmin permissions.

To grant the **sysadmin** permission for the DatabaseCreator user:

1. Open SQL Server Management Studio and connect to the SQL instance that you're going to use for the BeyondTrust Endpoint Privilege Management Reporting installation.
2. Navigate to the **Security > Logins** folder.
3. You must add your user to this folder if it hasn't previously been used to authenticate with SQL Server. To do this:
 - Right-click on the **Logins** folder and click **New Login**.
 - Click **Search** to the right of the **Login name** option. If you know the domain and user name you need to add you can type it here, and then click **Check Name**. If you're not sure about the user's details you can click **Advanced** to browse to the user you want to use. Click **OK** and **OK** again to finish adding the user.
4. In the **Logins** folder, right-click on the user to use as the **DatabaseCreator** and select **Properties**.
5. Click **Server Roles** from the left menu and check the **sysadmin** box.
6. Click **OK** to add the **sysadmin** privilege to the user.



Note: If Windows Authentication is specified for the SQL connection, and you're not using an admin account, the user must have **Alter Any Login** and **Create Any Database** permissions on the SQL server instance, in order for the **Reporting Services Instance User** to be created. If you receive error 15247, verify these permissions have been granted.

ReportReader User

The *ReportReader* user is a Windows or SQL account that is used by the Endpoint Privilege Management ePO Extension to read report events from the Endpoint Privilege Management database. The registered server **BeyondTrust Endpoint Privilege Management Reporting** uses this account, so you should make a note of it.

If this is a Windows account, you need to grant the following permission:

- Requires the **Allow Log on Locally** permission to the server hosting SSRS. This is granted automatically if the account is in the Administrators user group.

Some domain groups have this permission set. It's up to you how you configure this account as long as it has the **Allow log on Locally** permission granted through group membership or as an exception.

EventParser User

The *EventParser* user is used by the Endpoint Privilege Management ePO Extension to read data from the ePO database and write it to the Endpoint Privilege Management Reporting database. The registered server **BeyondTrust Staging** uses this account, so you should make a note of it.

This account needs to be able to authenticate on the database machine. If the two databases are on different machines, then this account needs to be on a shared domain.

DataAdmin User

The *DataAdmin* user is a Windows or SQL account that is used by the Endpoint Privilege Management ePO Extension to write to the Endpoint Privilege Management for Mac database. The registered server **BeyondTrust Purge** uses this account by default.

If this is a Windows account, you need to grant the following permission:

- Requires the **Allow Log on Locally** permission to the server hosting SSRS. This is granted automatically if the account is in the Administrators group.

Some domain groups have this permission set. It's up to you how you configure this account as long as it has the **Allow log on Locally** permission granted through group membership or as an exception.

Install the Endpoint Privilege Management Reporting Database

To install Endpoint Privilege Management Reporting database, run the Endpoint Privilege Management Reporting Database installation package with the **Database Creator** user that you set up when you created the required user accounts.


- If you are running the installer on the same machine as the database, use **Endpoint Privilege Management ReportingDatabase.msi**.
- If you are running the installer on a client machine, use **Endpoint Privilege Management ReportingDatabase.exe**. This includes the SQL Native Client Redistributable package.




Note: *The Endpoint Privilege Management Reporting Database installer assigns specific privileges to the user accounts that you created previously.*

1. Run the installation package and click **Next** to continue. The **License Agreement** dialog box appears.
2. To accept the agreement, select **I accept the terms in the license agreement** and click **Next**. The **Database Server** dialog box appears.
3. Set the **Database server to use for Endpoint Privilege Management audit data** as **(local)** if you are using the same machine for your database server and you didn't create an instance. If you did create an instance, you need to add it here, for example **(local)\BeyondTrustReporting**, where the instance is **BeyondTrustReporting**. The database servers are available from the dropdown menu.
4. Type a new name in the **Name of database catalog for Endpoint Privilege Management audit data** field.

- Select to either use the Windows credentials of the current user or you can use SQL server authentication. If you choose SQL server authentication you need to enter the **Login ID** and **Password** before you can proceed.

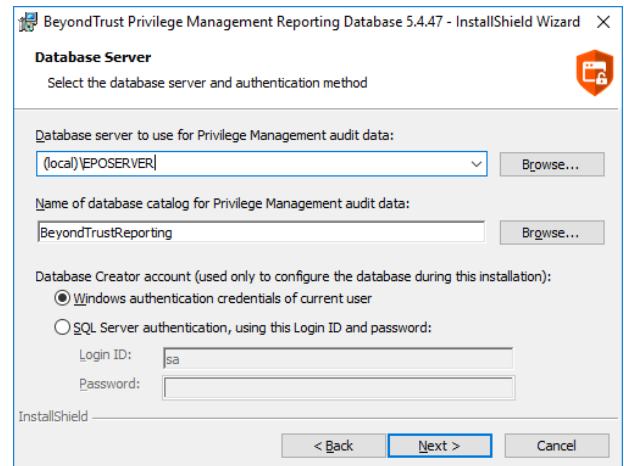


- Click **Next**. The **Configure Event Parser Database User** dialog box appears.
- If you are using the default Endpoint Privilege Management Reporting database users for BeyondTrust Reporting, check the **Configure a user in the database for the event parser service** box. Select your **EventParser** user. In this example we are using a Windows user that we've previously created.
- Click **Browse** and navigate to the **EventParser** user that you created.

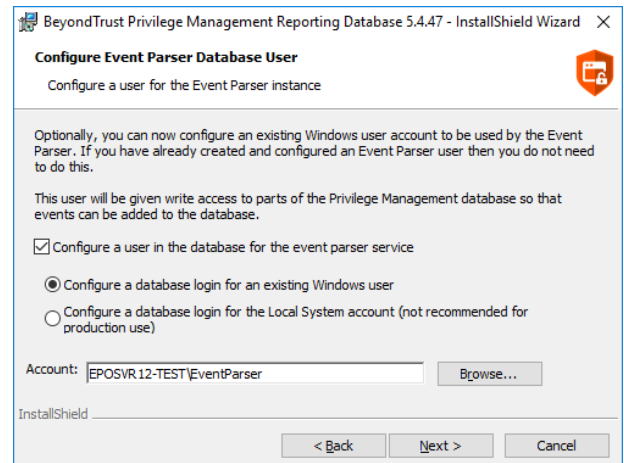


Note: Once you have selected a local or domain machine, ensure you select a user that you know exists in that location; otherwise, the installation will fail.


- Click **Next**. The **Configure Reporting Services Database User** dialog box appears.
- If you are using the default Reporting users for Endpoint Privilege Management Reporting, check the **Create or configure a user in the database to read data for the reports** box. Select to either use an existing Windows user or create a new SQL server user. In this example we use a Windows user that we previously created.

- Click **Browse** to navigate to the **ReportReader** user that you created.

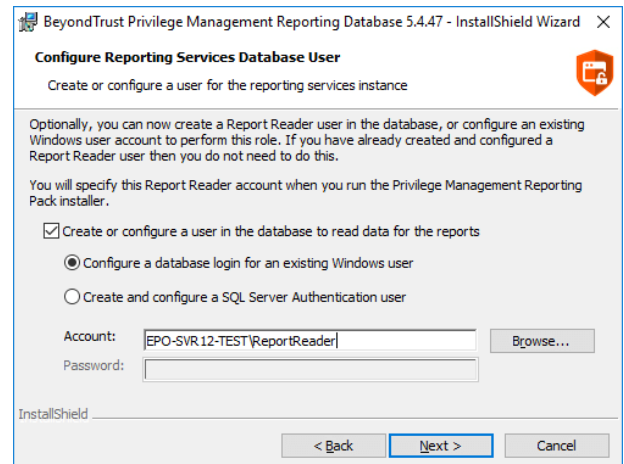


Note: Once you have selected a local or domain machine, ensure you select a user that you know exists in that location; otherwise, the installation will fail.

- Click **Next**. The **Configure Data Admin Database User** dialog box appears.

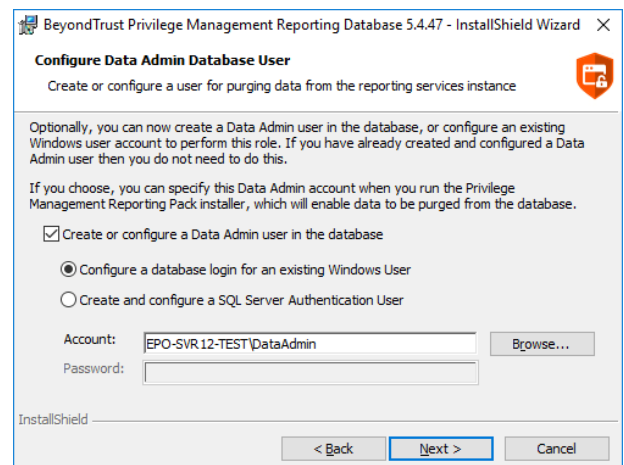

- If you are using the default Reporting users for Endpoint Privilege Management Reporting, check the **Create or configure a Data Admin user in the database** box. Select to either use an existing Windows user or create a new SQL server user. In this example we use a Windows user that we previously created.
- Click **Browse** to navigate to the **DataAdmin** user that you created.



Note: Ensure you select a user that you know exists on the domain or local machine that you've selected; otherwise, the installation will fail.

- Click **Next** and then **Install** to finish the installation. You have now installed the Endpoint Privilege Management Reporting database.




For more information, please see "[Create the Required Database User Accounts](#)" on page 17.

Configure Permissions for the EventParser User

You must grant the **View database state** permission on the Reporting database for the EventParser user that you created during the database installation. This permission is already granted on the ePO database by the installer.

1. Open SQL Server Management Studio and connect to your Reporting database.
2. Right-click on the Reporting database, select **Properties** from the Reporting database, and click **Permissions** on the left menu.
3. Select the **EventParser** user from the **Users or roles** section.
4. Check the **Grant** box for the **View database state** permission.

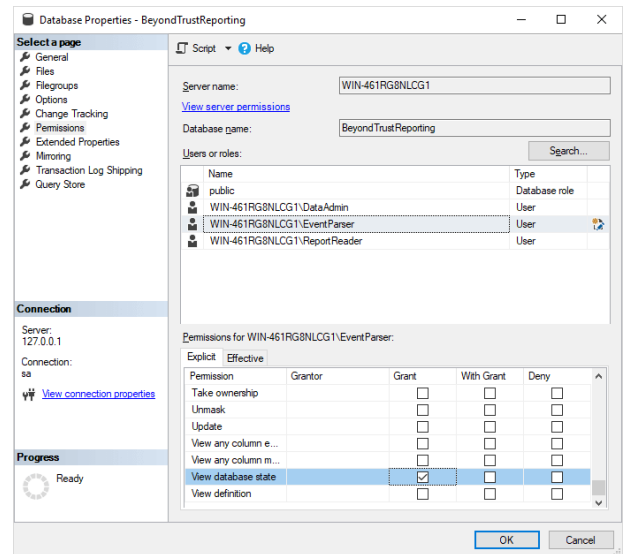

Create Registered Servers for Your Deployment

There are three registered servers you can configure in the Endpoint Privilege Management ePO Extension for Reporting. What you need to configure will depend on your setup.

Compulsory: BeyondTrust Endpoint Privilege Management Reporting

You need to configure this registered server if you are using Endpoint Privilege Management Reporting.

Server tasks that use the Reporting registered server:

- BeyondTrust Endpoint Privilege Management Reputation Update to update the reputation.

This registered server uses the ReportReader account that was configured by the Endpoint Privilege Management database installer. Alternatively, you can use a system administration account.



For information on how to set up your BeyondTrust Reporting registered server, please see "[Configure the BeyondTrust Reporting Registered Server](#)" on page 24.

Optional: BeyondTrust Reporting Staging

This registered server allows you to use the EventParser user to move events to the staging table.

Server tasks that use the Reporting registered server:

- BeyondTrust Endpoint Privilege Management Reporting Event Staging. If it's not configured, it uses the BeyondTrust Reporting registered server.

This registered server uses the EventParser user account that was configured by the Endpoint Privilege Management database installer. Alternatively, you can use a system administration account.



For information on how to set up your BeyondTrust Reporting registered server, please see "[Configure the Endpoint Privilege Management Reporting Staging Registered Server](#)" on page 24.

Optional: BeyondTrust Admin

This registered server allows you to use the DataAdmin user to manage the purging of data.

Server tasks that use the Reporting registered server:

- BeyondTrust Reporting Purge. If it's not configured, it uses the BeyondTrust staging registered server if that has been configured; if not, it uses the Reporting registered server user instead.


This registered server uses the DataAdmin account that was configured by the Endpoint Privilege Management database installer. Alternatively, you can use a system administration account.



For information on how to set up your BeyondTrust Reporting registered server, please see "[Configure the BeyondTrust Admin Registered Server](#)" on page 25.

Configure the BeyondTrust Reporting Registered Server

1. Log in to **ePolicy Orchestrator**, navigate to **Menu > Configuration > Registered Servers**, and select **New Server**.
2. On the next page, select **BeyondTrustEndpoint Privilege Management Reporting** from the **Server type** dropdown menu and enter an appropriate name (**BeyondTrust Reporting ER Server**, for example). Click **Next**.

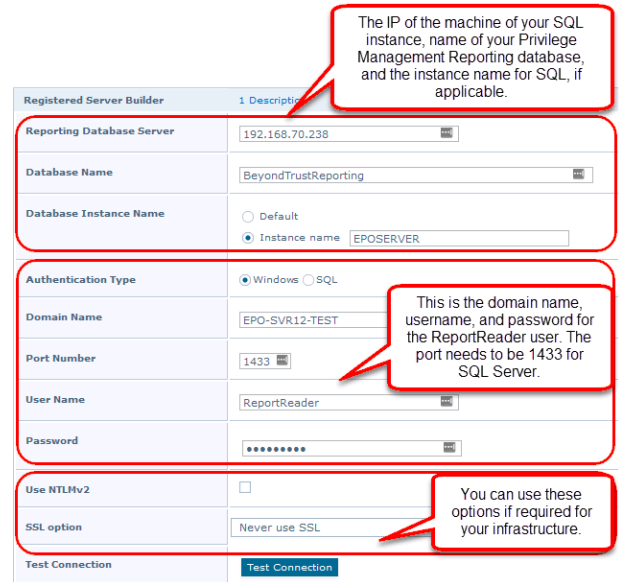

The screenshot shows the 'Registered Server Builder' configuration page. The fields are as follows:

- Reporting Database Server:** 192.168.70.238 (Callout: The IP of the machine of your SQL instance, name of your Privilege Management Reporting database, and the instance name for SQL, if applicable.)
- Database Name:** BeyondTrustReporting
- Database Instance Name:** Instance name (selected), EPOSERVER
- Authentication Type:** Windows (selected), SQL
- Domain Name:** EPO-SVR12-TEST (Callout: This is the domain name, username, and password for the ReportReader user. The port needs to be 1433 for SQL Server.)
- Port Number:** 1433
- User Name:** ReportReader
- Password:** [Redacted]
- Use NTLMv2:** [Unchecked]
- SSL option:** Never use SSL (Callout: You can use these options if required for your infrastructure.)
- Test Connection:** [Test Connection button]



Note: This screen shot shows example data.

3. Complete the configuration page with the server details. The **Port Number** should be set to 1433.
4. Click **Test Connection**. On successful connection, click **Save**.

Configure the Endpoint Privilege Management Reporting Staging Registered Server




Note: If this is an upgrade, and you do not have a registered server for BeyondTrust Endpoint Privilege Management Reporting Staging, the server tasks attempt to use the Reporting registered server. Please see "[Configure the BeyondTrust Reporting Registered Server](#)" on page 24. This is for backwards compatibility and additional permissions are required.



Note: The screen shot shows example data.

1. Log in to **ePolicy Orchestrator**, navigate to **Menu > Configuration > Registered Servers**, and click **New Server**.
2. On the next page, select **BeyondTrust Endpoint Privilege Management Reporting Staging** from the **Server type** dropdown menu and enter an appropriate name (**BeyondTrust Staging Server**, for example). Click **Next**.
3. Complete the configuration page and click **Test Connection**. On successful connection, click **Save**.

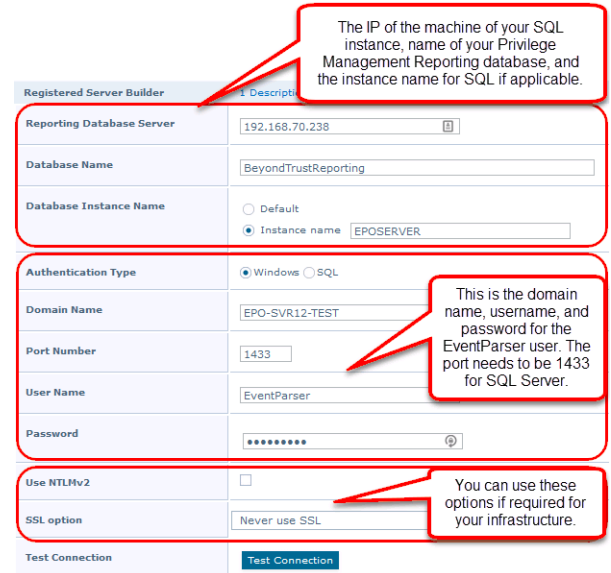

The IP of the machine of your SQL instance, name of your Privilege Management Reporting database, and the instance name for SQL if applicable.


This is the domain name, username, and password for the EventParser user. The port needs to be 1433 for SQL Server.

You can use these options if required for your infrastructure.

Configure the BeyondTrust Admin Registered Server

1. Log in to **ePolicy Orchestrator**, navigate to **Menu > Configuration > Registered Servers**, and click **New Server**.
2. On the next page, select **BeyondTrust Endpoint Privilege Management Reporting Admin** from the **Server type** dropdown menu and enter an appropriate name (**BeyondTrust Admin Purge Server**, for example). Click **Next**.

This screen shot shows example data.

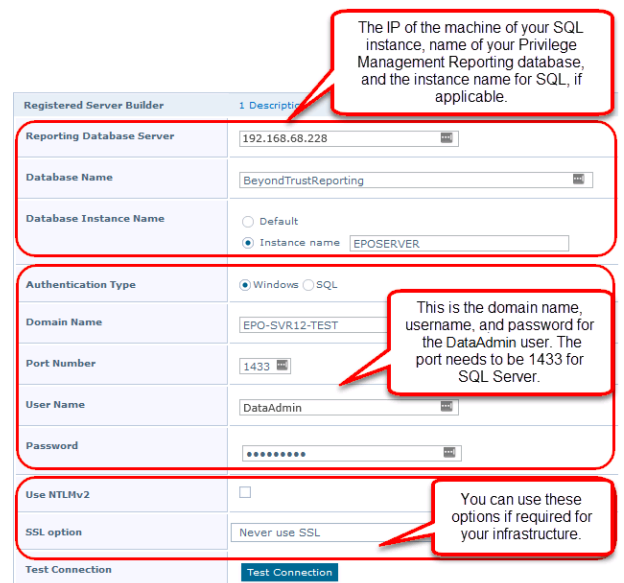

The IP of the machine of your SQL instance, name of your Privilege Management Reporting database, and the instance name for SQL, if applicable.

This is the domain name, username, and password for the DataAdmin user. The port needs to be 1433 for SQL Server.

You can use these options if required for your infrastructure.

3. Complete the configuration page and click **Test Connection**. On successful connection, click **Save**.


Configure the Database Server Registered Server

A Database server registered server allows you to query Endpoint Privilege Management events in the Endpoint Privilege Management database using the **Queries and Reports** capability in ePO.



Note: This screen shot shows example data.

1. Log in to **ePolicy Orchestrator**, navigate to **Menu > Configuration > Registered Servers**, and click **New Server**.
2. On the next page, select **Database Server** from the **Server type** dropdown menu and enter an appropriate name (**Endpoint Privilege Management Database Server**, for example). Click **Next**.

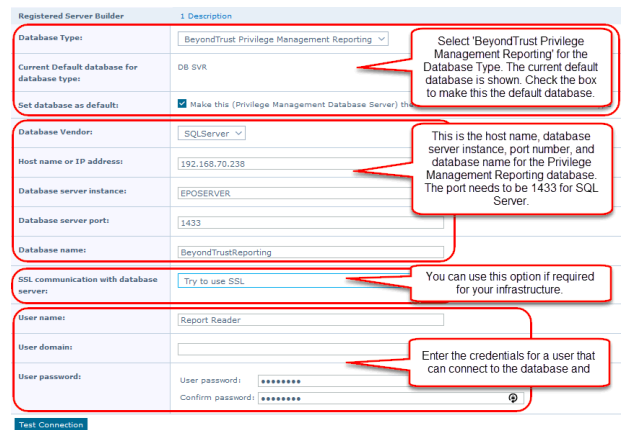

The screenshot shows the 'Registered Server Builder' configuration page. The form includes the following fields and callouts:

- Database Type:** BeyondTrust Privilege Management Reporting. Callout: Select 'BeyondTrust Privilege Management Reporting' for the Database Type. The current default database is shown. Check the box to make this the default database.
- Current Default database for database type:** DB SVR.
- Set database as default:** Make this (Privilege Management Database Server) the default database.
- Database Vendor:** SQLServer.
- Host name or IP address:** 192.168.70.238. Callout: This is the host name, database server instance, port number, and database name for the Privilege Management Reporting database. The port needs to be 1433 for SQL Server.
- Database server instance:** EPOSERVER.
- Database server port:** 1433.
- Database name:** BeyondTrustReporting.
- SSL communication with database server:** Try to use SSL. Callout: You can use this option if required for your infrastructure.
- User name:** Report Reader.
- User domain:** (empty field).
- User password:** User password: *****. Callout: Enter the credentials for a user that can connect to the database and Confirm password: *****.

Test Connection button is visible at the bottom.

3. Complete the configuration page and click **Test Connection**. On successful connection, click **Save**.

Create Automated Tasks Using ePO Server Tasks

You use ePO server tasks to create an automated schedule of tasks that you want your ePO server to perform. The following ePO server tasks are used for Endpoint Privilege Management for Mac:

- **Create the BeyondTrust Endpoint Privilege Management Reputation Update Server Task:** Optional to update the reputation from VirusTotal and/or TIE.
- **Create the Purge Threat Event Log Server Task:** Optional to purge the ePO threat event log.

There is an additional server task that you can create if you have a business need to purge the events from the BeyondTrust table in the ePO database only.

We recommend you use the built-in ePO server task called **Purge Rolled up Data** rather than this server task. This will remove all the events from the BeyondTrust table in the ePO database and the Endpoint Privilege Management Reporting database.




For more information, please see the following:

- ["Create the Endpoint Privilege Management Reporting Reputation Update Server Task" on page 29](#)
- ["Create the Purge Threat Event Log Server Task" on page 30](#)

Create the Endpoint Privilege Management Reporting Event Staging Server Task

The **Reporting Event Staging** server task takes report events from the ePO database and inserts them into the BeyondTrust Endpoint Privilege Management Reporting database. You need to create this task to view BeyondTrust reports.


1. Navigate to **Menu > Automation > Server Tasks** and select **New Task**.

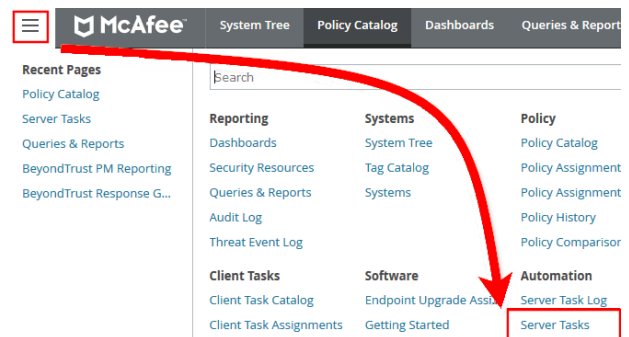

2. Enter an appropriate name (**BeyondTrust Event Staging**, for example), leave the **Schedule status** as **Enabled**, and click **Next**.
3. Select **BeyondTrust Endpoint Privilege Management Reporting Event Staging** from the **Actions** dropdown menu and click **Next**.

4. Adjust the times to check for events to suit your environment and click **Next**.

- **Time in minutes to check for staging events:** The recommended value is 55 minutes.
- **Number of events to transfer for each transaction (batch size):** The default value is 1. Only increase the value if there is a lag in performance throughput between ePO to Endpoint Privilege Management Reporting.
- **Time in seconds to sleep when there are no events:** The recommended value is 60 seconds.
- **Time in milliseconds to pause between reading each event:** The default and recommended value is 0.
- **Time in minutes between polling the queue lengths:** The recommended value is 5 minutes.
- **Verbose logging:** By default, verbose logging is turned off. Only use verbose logging when you need more details about the events being collected.

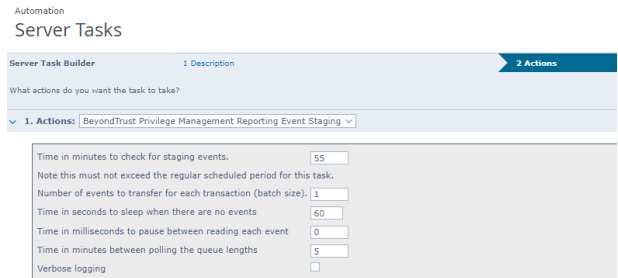

Automation
Server Tasks

Server Task Builder 1 Description 2 Actions

What actions do you want the task to take?

1. Actions: BeyondTrust Privilege Management Reporting Event Staging

Time in minutes to check for staging events. 55
Note this must not exceed the regular scheduled period for this task.

Number of events to transfer for each transaction (batch size): 1

Time in seconds to sleep when there are no events 60

Time in milliseconds to pause between reading each event 0

Time in minutes between polling the queue lengths 5


Verbose logging

5. On the **Schedule** page, set the **Schedule type** to your preference.
6. Select the **Start date** and **End date** if required. By default, **No end date** is selected.
7. Adjust the time that you want the schedule to run. This is the time of the machine running the ePO server. Click **Next**. You are presented with a summary of the server task.
8. Select **Save** to finish creating the server task.


Create the Endpoint Privilege Management Reporting Purge Server Task

You can purge Reporting database events that are older than a defined period in order to manage the size of your database.

1. Navigate to **Menu > Automation > Server Tasks** and select **New Task**.

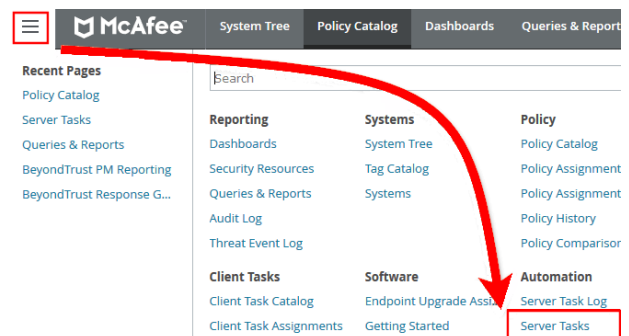

2. Enter an appropriate name (**BeyondTrust Purge**, for example), leave **Schedule status** as **Enabled**, and click **Next**.
3. Select **BeyondTrust Endpoint Privilege Management Reporting Purge** from the **Actions** dropdown menu.
4. Choose the number of months to purge events older than.

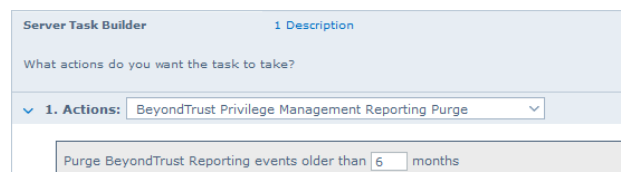

Server Task Builder 1 Description

What actions do you want the task to take?

1. Actions: BeyondTrust Privilege Management Reporting Purge

Purge BeyondTrust Reporting events older than 6 months


5. On the **Schedule** page set the **Schedule type** to your preference.
6. Select the **Start date** and **End date**, if required. By default, **No end date** is selected.

- Adjust the time that you want the schedule to run. This is the time of the machine running the ePO server. Click **Next**. You are presented with a summary of the server task.
- Click **Save** to finish creating the server task.

Create the Endpoint Privilege Management Reporting Reputation Update Server Task

You can update the reputation, provided that it is configured using this server task.

- Navigate to **Menu > Automation > Server Tasks** and click **New Task**.

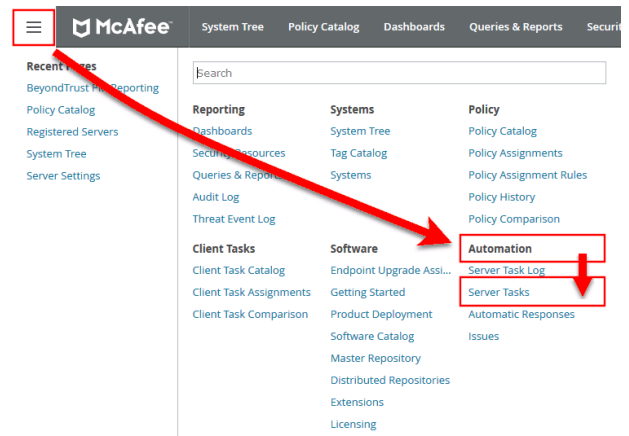


- Enter an appropriate name, such as **BeyondTrust Reputation Update**, leave **Schedule status** as **Enabled**, and click **Next**.
- Select **BeyondTrust Endpoint Privilege Management Reputation Update** from the **Actions** dropdown menu.
- Check the boxes adjacent to the reputations you want to update. You can then select from **Add Reputation to entries with no reputation** or **Update Reputation for entries with old reputation**. If you select the latter option, you can choose the number of days. Click **Next**.
- On the **Schedule** page set the **Schedule type** to your preference.
- Select the **Start date** and **End date**, if required. By default, **No end date** is selected.
- Adjust the time that you want the schedule to run. This is the time of the machine running the ePO server. Click **Next**. You are presented with a summary of the server task.
- Click **Save** to finish creating the server task.

Create the Purge Threat Event Log Server Task

You can purge threat events from the event log using this server task. Before you use this server task you need to create a query for it to use.


Create the Purge Threat Event Log Query

1. Click **Queries and Reports** and click **New Query**.
2. From the left side, click **BeyondTrust Endpoint Privilege Management** and click **Next**.
3. Select **List > Table** from the left side and click **Next**.
4. Click **Next** on the **Select Columns** page.
5. On the **Filter** page click **BeyondTrust Event ID**.
6. Select **Greater than or equals** and enter **100** for the **Value**.
7. Click the plus symbol (+) and change the filter to **and**.
8. Select **Less than or equals** and enter **400** for the **Value**.
9. On the same **Filter** page, click **Start Time**.
10. Select **Is not within the last** and configure the time period to say how many days/months/years of data you want to keep.
11. Click **Save** and give the query a name, such as **ePO Purge Threat Event**.




Create the ePO Purge Threat Event Server Task

1. Select **Menu > Automation > Server Tasks** and select **New Task**.

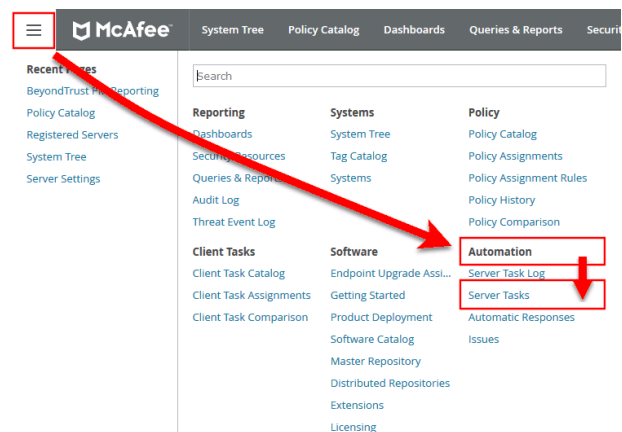


2. Enter an appropriate name (**Purge Threat Event Log**, for example), leave **Schedule status** as **Enabled**, and click **Next**.
3. Select **Purge Threat Event Log** from the **Actions** dropdown menu.
4. Select from **Purge records older than** or **Purge by query** and choose your criteria.

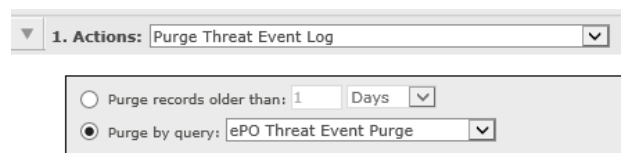

5. On the **Schedule** page set the **Schedule type** to your preference.
6. Select the **Start date** and **End date**, if required. By default, **No end date** is selected.
7. Adjust the time that you want the schedule to run. This is the time of the machine running the ePO server. Click **Next**. You are presented with a summary of the server task.
8. Click **Save** to finish creating the server task.

Run an Automated Task Outside the Scheduled Time

You can run the server tasks you have created from the **Server Tasks** page in ePO. This lists all the server tasks. You can run a task by clicking the **Run** link on the right side of the row:



Name	Status	Type	Schedule	Next Run	Last Run	Actions
A Event Staging Task - BeyondTrust Events	Enabled	User	Daily	5/16/19 1:00 AM	3/15/19 1:00 AM	View Edit Run
Disaster Recovery Snapshot Server	Enabled	System	Daily	5/16/19 1:09 AM	3/15/19 1:09 AM	View Edit Run
Download Software Product List	Enabled	User	Daily	5/16/19 1:07 AM	3/15/19 1:07 AM	View Edit Run

Performance Tuning on the ePO Server

The default configuration of an ePO Server allows two concurrent tasks that share a single processor core. For larger systems, this may have a performance implication. Your ePO Server can be configured to make better use of the processor cores for scheduled tasks.

1. Navigate to **Menu > Server Settings > Scheduler Tasks**.
2. Click **Edit**.
3. From **Total maximum tasks**, select **Absolute maximum calculation**.

This ensures you are not restricted to using only a single core for calculations.



Note: Your ePO Server must be restarted for these changes to take effect.